


HRN-RZ04T4 (Kubota TUG Harness) Installation Guide

Figure 1: The harness and wiring table.

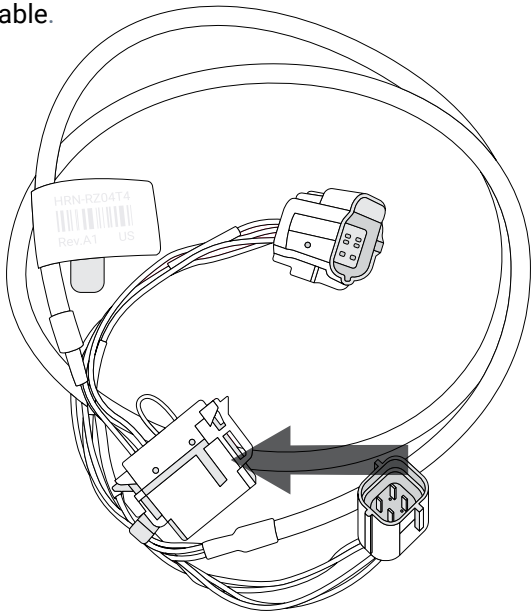

Pin number	Pin color	Pin definition
6	Red/Orange	Battery
4	Black/White	Ground
2	Blue	CAN +
5	Green/White	CAN -

Step 1: This is a plug-and-play harness (**Figure 1**). The plug for this harness is in the engine compartment, approximately on top of the front of the valve cover. See **Figure 2** below for an example.

Figure 2


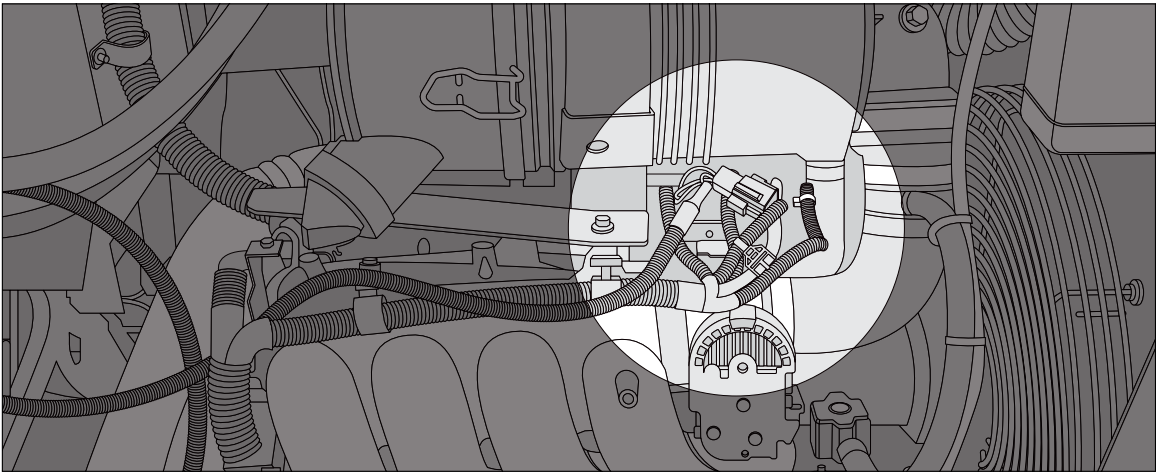


Figure 3:

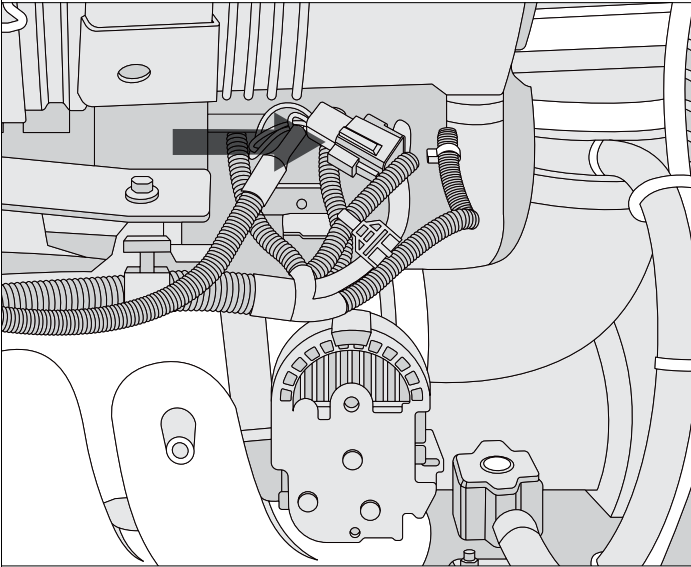

Step 2:

Locate the harness connector, expose the connector, and then connect the harness. Place the wiring harness alongside the existing factory harness (**Figure 3**). Be sure to run the wiring away from any hazards (**Figure 4**).

Figure 4:


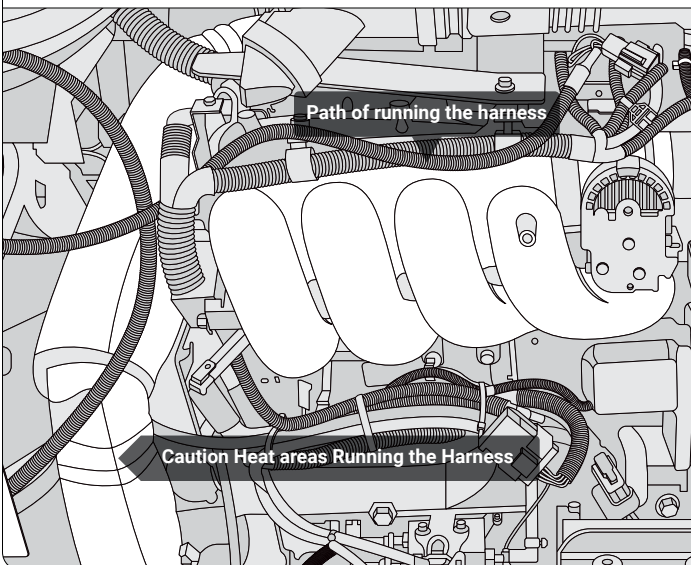


Figure 5:

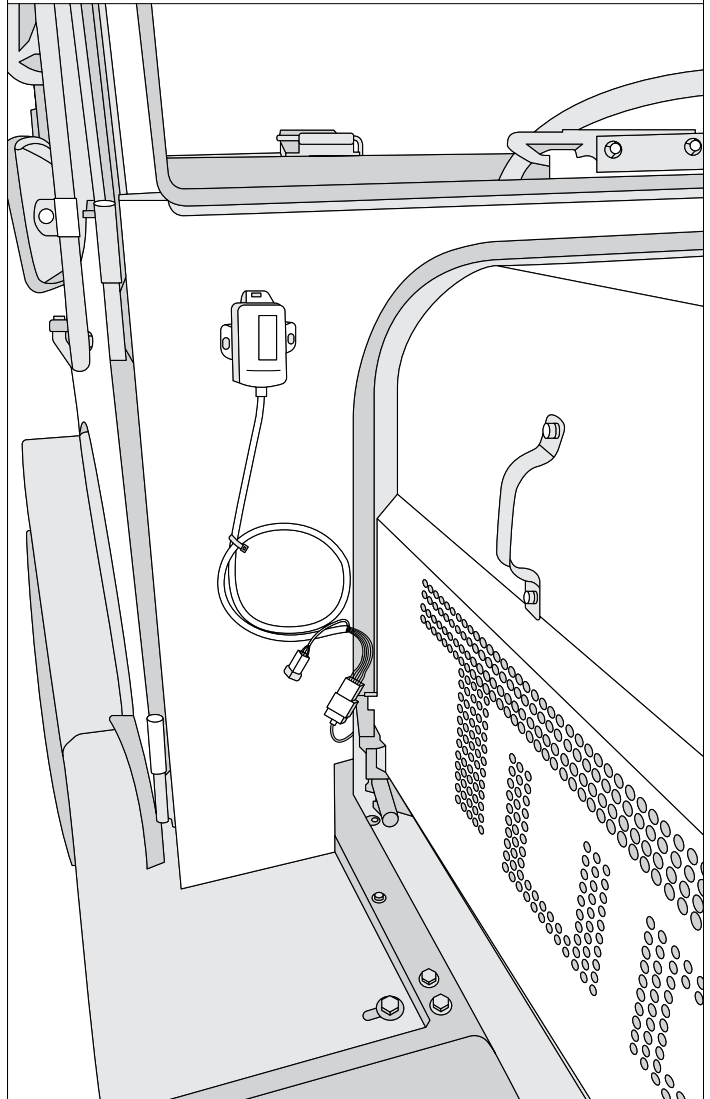

Step 3:

Mount the device on the location designated by the customer. Secure the harness to the engine compartment, and then connect the harness to the ECM cable. See **Figure 5** above for an example.